


Product Size

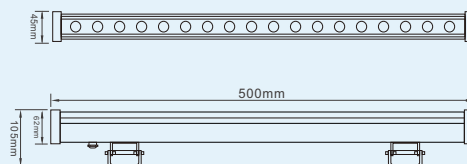

Specification

Model No.:	RS-WW18W-BS(88305)
Front cover & Housing:	Aluminum body
Dimensions:	L500*W45*H62mm(H105mm with bracket)
Tempered Glass:	3mm thickness
LED chip:	Epistar
LED Q'ty:	18pcs 1W LED
Cable gland:	Nickel plated brass PG9
Driver:	Constant current driver
Lens:	Clear, Bead, Frosted
Beam Angle Options:	10° 30° 45° 60° 90°
Power Cable:	2*1.0mm ² / 3*0.75mm ² / 4*0.75mm ² / 2*1.0mm ² +3*0.75mm ² VDE rubber cable
Protection Class:	IP65
Environment:	Dry
Mounting Hardware:	Wall Mounted System
Net Weight:	1.6kgs with 1m cable
Lifetime:	>50000H

Order information

Item code	Color	Light source(w)	Line Way	Input Voltage (v)	Operating current (mA)	Consumption (w)	Luminous (lm)
88305.181.01	2700-3000K	18*1	V+/V- or L/N/G	DC24, AC90-230	750 / 82-163	18	1620
88305.181.02	4000-4500K	18*1	V+/V- or L/N/G	DC24, AC90-230	750 / 82-163	18	1710
88305.181.03	5000-5500K	18*1	V+/V- or L/N/G	DC24, AC90-230	750 / 82-163	18	1800
88305.181.04	6000-6500K	18*1	V+/V- or L/N/G	DC24, AC90-230	750 / 82-163	18	1800
88305.181.05	Red	18*1	V+/V- or L/N/G	DC24, AC90-230	750 / 82-163	18	450
88305.181.06	Green	18*1	V+/V- or L/N/G	DC24, AC90-230	750 / 82-163	18	1080
88305.181.07	Blue	18*1	V+/V- or L/N/G	DC24, AC90-230	750 / 82-163	18	540
88305.181.08	Yellow	18*1	V+/V- or L/N/G	DC24, AC90-230	750 / 82-163	18	1260
88305.181.09	RGB-DMX512 (3 channel)	18*1	V+/V- /D+/D-/GND	DC24	R: 250 B: 250 G: 250	R: 6 B: 6 G: 6	R: 150 B: 180 G: 360
88305.181.10	Auto changing color	18*1	V+/V-	AC24	R: 250 B: 250 G: 250	R: 6 B: 6 G: 6	R: 150 B: 180 G: 360
88305.181.12	RGBV+ (build-in CC driver)	18*1	R/G/B/V+	DC24	R: 250 B: 250 G: 250	R: 6 B: 6 G: 6	R: 150 B: 180 G: 360

