




Product Size

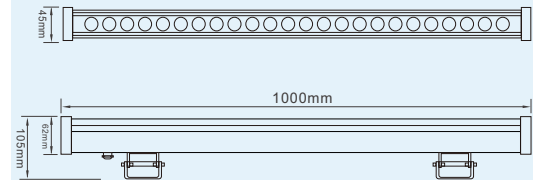

Specification

Model No.:	RS-WW24W-B(88306)
Front cover & Housing:	Aluminum body
Dimensions:	L1000*W45*H62mm(H105mm with bracket)
Tempered Glass:	3mm thickness
LED chip:	Epistar
LED Q'ty:	24pcs 1W LED
Cable gland:	Nickel plated brass PG9
Driver:	Constant current driver
Lens:	Clear, Bead, Frosted
Beam Angle Options:	10° 30° 45° 60° 90°
Power Cable:	2*1.0mm ² / 3*0.75mm ² / 4*0.75mm ² / 2*1.0mm ² +3*0.75mm ² VDE rubber cable
Protection Class:	IP65
Environment:	Dry
Mounting Hardware:	Wall Mounted System
Net Weight:	2.8kgs with 1m cable
Lifetime:	>50000H

Order information

Item code	Color	Light source(w)	Line Way	Input Voltage (v)	Operating current (mA)	Consumption (w)	Luminous (lm)
88306.241.01	2700-3000K	24*1	V+/V- or L/N/G	DC24, AC90-230	1000 / 109-218	24	2160
88306.241.02	4000-4500K	24*1	V+/V- or L/N/G	DC24, AC90-230	1000 / 109-218	24	2280
88306.241.03	5000-5500K	24*1	V+/V- or L/N/G	DC24, AC90-230	1000 / 109-218	24	2400
88306.241.04	6000-6500K	24*1	V+/V- or L/N/G	DC24, AC90-230	1000 / 109-218	24	2400
88306.241.05	Red	24*1	V+/V- or L/N/G	DC24, AC90-230	1000 / 109-218	24	600
88306.241.06	Green	24*1	V+/V- or L/N/G	DC24, AC90-230	1000 / 109-218	24	1440
88306.241.07	Blue	24*1	V+/V- or L/N/G	DC24, AC90-230	1000 / 109-218	24	720
88306.241.08	Yellow	24*1	V+/V- or L/N/G	DC24, AC90-230	1000 / 109-218	24	1680
88306.241.09	RGB-DMX512 (3 channel)	24*1	V+/V- /D+/D-/GND	DC24	R: 333 B: 333 G: 333	R: 8 B: 8 G: 8	R: 200 B: 240 G: 480
88306.241.10	Auto changing color	24*1	V+/V-	AC24	R: 333 B: 333 G: 333	R: 8 B: 8 G: 8	R: 200 B: 240 G: 480
88306.241.12	RGBV+ (build-in CC driver)	24*1	R/G/B/V+	DC24	R: 333 B: 333 G: 333	R: 8 B: 8 G: 8	R: 200 B: 240 G: 480

